

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>G02B 21/26, 21/16</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/19262</b> (43) International Publication Date: 6 April 2000 (06.04.00)
(21) International Application Number: PCT/US99/19086 (22) International Filing Date: 23 August 1999 (23.08.99) (30) Priority Data: 60/102,434                      30 September 1998 (30.09.98)    US (71) Applicant: TRELLIS BIOINFORMATICS, INC. [US/US]; 1489 Webster Street, 521, San Francisco, CA 94115 (US). (72) Inventors: KAUVAR, Lawrence, M.; 1489 Webster Street, 521, San Francisco, CA 94115 (US). SEDAT, John; San Francisco, CA 94127 (US). (74) Agents: MURASHIGE, Kate, H. et al.; Morrison & Foerster LLP, 2000 Pennsylvania Avenue, N.W., Washington, DC 20006-1888 (US).		(81) Designated States: AU, CA, IL, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: HIGH THROUGHPUT MICROSCOPY

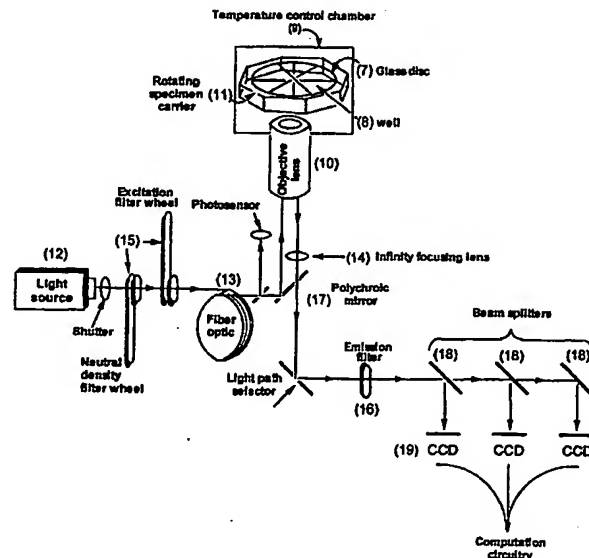

(57) Abstract

A system for use in high resolution, high throughput, three-dimensional, fluorescence microscopy includes one or more of the following in operable combination: a circular rotatable disc to present a multiplicity of samples for viewing with an infinity imaging means, a pulsed light source which emits light at intervals consistent with data collection, beam splitters and filters in the emission light pathway which cause the same primary light to be imaged on multiple CCD detectors, means for regulating the temperature of the sample, and means for recognizing patterns and signatures that detect specific features of the components of a sample.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## HIGH THROUGHPUT MICROSCOPY

### Technical Field

5 The present invention relates generally to high resolution, three dimensional, fluorescence microscopy systems and methods for their use. More specifically the invention represents specific improvements to existing wide-field, optical sectioning microscopes systems designed for acquisition and analysis of multi-dimensional fluorescence images.

### 10 Background Art

The field of optical microscopy has been revolutionized in recent years by the widespread use of confocal and fluorescent microscopes. Combining laser illumination and digital image processing, these optical instruments allow biologists to obtain high-resolution, three dimensional fluorescent images.

15 Deconvolution microscopy, an alternative approach to laser-scanning cofocal microscopy, is gaining in popularity. This technology avoids the high costs and limitations of laser illumination and is ideal for live-cell studies requiring high resolution and multiple wave lengths. Typical of the devices of this type is the Delta Vision<sup>®</sup> microscope system. Delta Vision<sup>®</sup> system is a wide-field optical sectioning microscope system. See, for example, info@api.com and U.S. Patent No. 5,684,628. The basic  
20 concepts embodied in the Delta Vision<sup>®</sup> system include: collection of imaging data directly in digital form using a high quality charge coupled device, i.e., CCD (silicon chip) area detector; computation removal of noise arising from light leakage into the focal plane from adjacent planes, provision of a facile user interface for data capture and  
25 analysis.

### Disclosure of the Invention

The invention is directed to improvements to a standard wide field microscope system, e.g. the Delta Vision<sup>®</sup> system. The improvements permit imaging of more than  
30 1,000, preferably more than 10,000 samples, e.g. antibody/antigen reactions, per day. The basic system to which these improvements are applied share generally the features of a fluorescent microscope -- i.e., excitation and emission filters, an objective lens, a

movable stage, and image recording by CCD. Such basic instruments also are able to image transmitted light.

The features which constitute improvements to this basic design fall into three general categories:

5        Optical features which constitute the improvements of the invention include a pulsed light source, a fiber-optic light source, a computer-controlled condenser, infinity focusing, polychromatic beam splitting and multiple CCD detectors rather than a single CCD detector.

10        Mechanical features which comprise the improvements of the invention include a rotatable circular disc in place of a conventional sample holder, wherein the disc may also contain further design features creating separate small wells; reagent dispenser and readout stations positioned around the disc, an arm that moves the dispenser and readout heads radially; a stage-tilting device, and a temperature-controlled specimen chamber.

15        In addition, the improvements comprise computational features including a control and calibration program, a nonhomogeneous illumination compensator, chromatic aberration compensator, a Fourier space feature detector, and a real space feature detector.

20        One object of the innovation is to minimize photodamage to the samples by pulsing the light source at a speed consistent with the rate of data collection. Fiber optics plumbing, pre- and post-specimen, with a rotating dichroic filter in the illumination path, enables more efficient automated operation. An automated condenser (e.g. to slide in masks for differential interference and polarization imaging) is also advantageous.

25        Another aspect of the invention relates to infinity imaging. This employs an objective lens with a sliding element to allow for switching between high and low magnification, a more efficient system than conventional rotating head microscopes. The image is further focused by sliding a secondary lens into the light path downstream from the objective lens. This simplifies positioning of the objective lens since the computer controlled motor for focusing can be placed physically out of the way. "Infinity imaging" also enhances the range of magnification possibilities, and eliminates  
30        moving parts from the proximity of the sample. This simplifies temperature control, for example permitting cooling of the specimen. Cooling the specimen sharpens the emission line widths enhancing the ability to recognize differences in hues.

A still further aspect of the invention is the use of beam splitters in conjunction with filters to allow the same primary light to be imaged onto multiple CCD detectors. Multiple detectors allow faster collection of data and more reliable image registration for detection of multiple colors.

5 In mechanical features, in one aspect, the invention employs rotatable circular discs in place of the typical microscope slides or 96-well plates. These discs are placed on a rotatable stage. Typically, the disc can range in size from a 4-inch diameter to 9 or 12 inches. The exact size of the disc is not critical. These discs are available from the computer chip industry. The discs can be painted with hydrophobic materials to form  
10 barriers which would define sample wells using lithographic techniques. The lithographic techniques employed are similar to those taught in U.S. Patent No. 5,212,028, the contents of which are incorporated herein by reference. Using these techniques, a 4-inch disc can be painted, for example, to form 2 mm segments which creates 1,000 sample wells and to form 1 mm segments which creates 2,500 wells.  
15 Alternatively, adhesive lines that allow the deposit of small specimen carriers can be used.

Other advantageous mechanical features of the invention are related to the use of these multispecimen discs. Thus, reagent dispensers and readout stations may be positioned around the disc and may be fitted with arms that move the dispensers and  
20 read-heads radially. Other mechanical features include a stage-tilting device and a temperature controlled specimen chamber, facilitated by the infinity focusing feature.

Computational aspects of the invention include dedicated circuitry and equivalent software for computational processing in areas which include data capture, photon reassignment, feature detection, counting and presentation. These measures facilitate  
25 control and coordinate data handling. Further, the circuitry and software equivalent permit the recognition of signature curves of particulate labels such as latex beads. This would permit the system to count and identify individual tags. An alternative filter can be designed to read microbar codes for sample tracking.

Other filters can also be defined computationally to improve the accuracy of cell  
30 counting. Cell borders can be recognized by virtue of lipid soluble dye, while definition of the nucleus can be achieved using a DNA stain like DAPI.

### Brief Description of the Drawings

Figure 1 illustrates a high resolution fluorescence microscope of the prior art which includes a light source (1), objective lens (3), eye pieces (5) and other enumerated elements.

- 5           Figure 2 illustrates one embodiment of the high throughput microscope (HTM) system of the invention.

### Detailed Description of the Invention

- 10           The present invention represents an improvement over systems which include elements, for example, present in the devices described in U.S. Patent No. 5,684,628, incorporated herein by reference. Such fluorescent microscopes provide the basis of image collection. A conventional fluorescent microscope is shown in Figure 1. A specimen is labeled with a fluorescent tag and placed on the microscope stage (1) which, in this conventional embodiment, is movable in an Cartesian coordinate system. The  
15           irradiating light is supplied from an arc lamp (2) through appropriate filters and shutters and through a fiber-optic system to an objective lens (3). The emitted light is filtered through a polychroic mirror (4) and deflected to the eye for visual inspection (5) or to a CCD array for detection using appropriate circuitry (6).

- 20           A modified form of the conventional system containing the improvements that comprise the invention is shown in Figure 2. The XYZ microscope stage is replaced by a rotatable stage (11) (specimen carrier) which supports a circular disc (7) specimen holder (disc). The specimen disc is divided into individual sample compartments (8) (well) which may be wells separated by hydrophobic barriers or adhesive segments. Disc technology is now available in the semiconductor chip industry for inspection,  
25           handling and automation of chip treatment. The system shown in Figure 2 can also be modified so that the disc can be placed on multiple positioning stages and/or on stages provided with stage tilting devices that permit the study of the microscopy samples at a variety of angles reducing certain kinds of light scattered noise. The circular specimen disc allows for more quantitative channels for faster reading, tracking of temporal  
30           phenomena, and the processing of large numbers of samples in parallel. The system can be designed to include one or more disc cassette towers which increases automation possibilities. The discs can be selectively moved from a cassette tower to the inspection stage, selectively rotated at a variety of angles, if desired, removed from the inspection

stage and selectively placed in a separate cassette tower or returned to the same position in the original cassette tower for storage or for subsequent viewing. This can be done manually or automatically. See for example U.S. Patent Nos. 4,938,654; 5,096,291; 5,119,434; 5,129,009; and 5,471,066, respectively, incorporated herein by reference.

- 5 The instrument may also be provided with a reagent dispenser and multiple readout stations around the circle described by the stage and disc. The dispensers and readout stations may be moved radially and the stage and disc rotated to provide multiple sampling opportunities.

- 10 The entire specimen compartment may be enclosed in a temperature controlled environment (9), schematically indicated in Figure 2. For example, to improve emission spectrum resolution, very low temperatures such as those of liquid nitrogen or liquid helium may be used. A detailed description of a labeling system which permits a multiplicity of hues to be generated on a particulate support, such as latex beads, is described in copending application U.S. Serial No. 09/146,984 filed 3 September 1998 and incorporated herein by reference. Briefly, by varying the ratio of dyes of primary colors on the particulate supports, or by varying the intensity of individual dyes, a large number of hues can be created. Cooling to very low temperatures permits more than ten primary colors for use in creating these individual hues, defined as the ratio of the primary colors attached to the beads. At present, latex beads are made with a doping precision better than  $\pm 5\%$ , so that even specifying only ten gray scale levels for each of ten primary colors provides ten billion distinguishable tags.

Of course, it is still within the invention to use conventional fluorescent labeling as well as the multihued fluorescent tags described in the above-referenced copending application.

- 25 In the embodiment wherein a closed chamber (9) encasing the sample is used, the objective lens (10) will generally protrude into the chamber. Eliminating the axis movement is the objective and thus desirable to maintaining a tight seal. The stage containing the disc (7) is movable independent of the objective lens. After a specimen is loaded with any desired fluorescent label, it is placed in a sample well (8) of the disc and positioned on the stage (11) and the area of interest is determined using ordinary visual inspection. Excitation light is then introduced to the sample through the objective lens (10) or through an optical fiber(s). As stated above, the temperature may be controlled. Warming permits one to maintain the samples within physiologically desirable
- 30



temperature ranges. Cooling of the disc or individual sample can sharpen emission band widths which enhance hue resolution.

In one embodiment of the present invention the light source (12) is pulsed so as to control any photodamage of the sample and the excitation beam is conducted through  
5 the objective lens by fiber-optic conduits (13).

The the automated image collection features of the system are used to acquire a series of images. After deconvolution, the images are combined to form a three-dimensional view of the specimen.

The series of images used to form the three-dimensional view is collected by  
10 moving the focal plane of the objective lens (10) through the specimen. This movement, usually called a z-scan, can be accomplished by moving either the sample or the objective lens. Alternatively, a secondary lens (14), in an infinity focusing system may be employed. The typical distance between sections ranges between 0.1  $\mu\text{m}$  to 5  $\mu\text{m}$ , with a total range of 5 mm. In the embodiments that include infinity focusing, the  
15 objective lens is coupled with a secondary sliding element lens (14). This secondary lens is located later in the light path. This combination also facilitates the controlled shift between low and high magnification. Extremely precise microstepping motors are used to achieve the small movements necessary.

In one embodiment, the light source is a mercury light source, which provides the  
20 illumination from the UV to the near-IR. This light source is capable of being pulsed at a speed consistent with the rate of data collection to minimize photodamage to microscopy sample. An optical fiber optic light scrambler homogenizes the illumination light, smoothing out arc lamp wander and evenly filling the back aperture of the objective lens. Excitation and emission wave lengths appropriate for the fluorescent  
25 probes being used are selected by multi-cavity interference filters. These filters transmit the desired wavelengths, while blocking more than 99% of the light from other regions of the spectrum. Between the excitation (15) (excitation filter wheel; neutral density filter wheel) and emission filter (16) is a movable custom polychroic mirror (17), which is a key component for wave length selection. The mirror consists of carefully selected  
30 reflection and transmission bands, designed to provided optimal performance for a wide variety of commonly used fluorescent probes. The use of a single mirror to image all probes means that no artifacts are introduced from components moving within the critical path. This is significant since artifacts resulting from optical component motion

are often indistinguishable from real information and can cause misinterpretation of the specimen characteristics.

Precise positioning of the emission filters (15) minimizes artifacts from wedging, dust, and filter variation. Although such artifacts can sometimes be minimized with digital processing techniques, details obscured by dirty optics will simply not be present in the final image. Superior images will yield superior results after deconvolution. Precise filter positioning allows different fluorescent probes to be imaged before moving the specimen. This approach provides the extremely accurate image alignment that is critical for co-localization studies. Systems that conduct a complete z-scan for each probe being imaged may suffer from image registration problems.

At least one CCD detector, typically cooled and scientific grade, collects the fluorescent images. This type of detector provides very sensitive light detection, low noise, and an extremely linear response to light intensity. Beam splitters (18) in conjunction with filters can be placed earlier in the light path relative to the CCD detector. This allows the same primary light to be imaged onto multiple CCD detectors (19). Multiple detectors permit faster collection of data and more reliable detection of mix-and-match colors. The use of multiple CCD detectors (19) is shown in Figure 2. This permits better discrimination between multihued particles and facilitates the use of multihued particle detection schemes.

Small photon detector elements allow the image to be oversampled, increasing the resolution possible with the system. Images acquired by the detectors are collected by suitable circuitry and the data managed by appropriate software to be displayed and/or stored in digital format.

After the images have been collected, they can be viewed and measured using a variety of powerful tools. These tools include the capacity to rotate, measure, highlight selected regions, and modify the image contrast. Deconvolution circuitry computationally reassigns blur present in the image. After correcting for variations due to arc flicker, an automated deconvolution process is triggered dedicated circuitry speed up the computational work. Equivalent circuit can be created by programming a more flexible circuit or by using software to create temporary circuits.

In the data capture aspect of the invention, each CCD chip has the accessory circuitry for data transfer and reinitialization. These need to be synchronized with the illumination system and specimen identifier as well as with control and calibration

functions such as checking and correcting for bad pixels or dirt on the lens. The associated circuitry also performs photon reassignment -- i.e., Fourier space deconvolution. The actual photon counts are the result of a convolution of point-spread function and the real sample. Correction for the differences in focus of different  
5 wavelengths -- chromatic aberration -- can be most conveniently corrected after this step. Thus, the computation system refracts streams of photons into image pixels and adjusts gain on a pixel-by-pixel basis.

The use of deconvolution in Fourier space permits the identification of certain  
10 features such as spherical latex beads, and permits a "bar code" to be embedded into a specimen for readout at this step. Photolithography can be used to create one or two dimensional patterns on a rod or chip of plastic which could be on the sample carrier or added to the sample. Thus, the identification of the sample being viewed is greatly aided. Similarly, in a deconvoluted real-space image, particular objects can be identified. Cell nuclei, for example, have characteristic dimensions and are typically separated from  
15 each other by cell membrane.

The plethora of information generated by the HTM can be managed by the circuitry. For example, in tissue typing, the deconvoluted image can be collapsed into a cartoon wherein multihued beads, each carrying a distinct typing antibody, are only counted if they are on the surface of white cells which are recognized as objects with  
20 having an outer membrane stained with a lipophilic dye, said membrane surrounding a nucleus stained, for example, with DAPI. They can be distinguished from beads not on the surface of white cells as well as those associated with nonnucleated red cells. In this application, the hue of the beads on a single cell surface should be consistent.

Thus, the multiplicity of improvements provided the present invention permits a  
25 truly high throughput system for analysis of large numbers of samples, each probed with a large number of detection agents. The many applications include tissue typing, identification of antigen-antibody interactions, real-time observation of intracellular movement of components and the like. Particular applications of this technology are further described in copending U.S. Serial No. 09/144,609 filed 31 August 1998 and  
30 incorporated herein by reference.

Claims

1. An improvement in a system for use in high resolution, three dimensional, fluorescence microscopy including:
  - 5 an objective lens,
  - a microscope stage for receiving and positioning a means for containing one or more samples to be viewed through said lens,
  - a light source providing light from the UV to the near IR wavelengths,
  - an excitation light pathway from said light source through said lens to said
  - 10 sample which includes means for directing light from said light source to said lens and means for selecting a desired wave length for excitation,
  - an emission light pathway from said sample through said objective lens to at least one CCD which includes a light path selector and an emission filter means, and
  - a computer imaging means connected to said CCD,
  - 15 wherein said improvement comprises providing a means for rotating said microscope stage and employing a rotatable circular disc as the means containing one or more samples for viewing.
2. The improvement of claim 1 wherein said rotatable circular disc is glass.
- 20 3. The improvement of claim 2 wherein said rotatable circular disc is divided into a multiplicity of sample-receiving areas.
4. The improvement of claim 3 wherein said areas are defined by
- 25 hydrophobic barriers.
5. The improvement of claim 3 wherein the sample-receiving areas are defined by an adhered adhesive.
- 30 6. The improvement of claim 1 which further comprises providing at least one reagent dispensing means and/or at least one readout station proximal to the periphery of the rotatable circular disc.

7. The improvement of claim 6 which further comprises a means to move said dispensing means and/or readout station radially.

8. The improvement of claim 1 which further includes a stage-tilting device.

5

9. An improvement in a system for use in high resolution, three dimensional, fluorescence microscopy applications including:

an objective lens,

a microscope stage for receiving and positioning a means for containing one or  
10 more samples to be viewed through said lens,

a light source providing light from the UV to the near IR wavelengths,

an excitation light pathway from said light source through said lens to said  
sample which includes means for directing light from said light source to said lens and  
means for selecting a desired wave length for excitation,

15 an emission light pathway from said sample through said objective lens to at least  
one CCD which includes a light path selector and an emission filter means, and

a computer imaging means connected to said CCD,

which improvement comprises

providing a secondary lens in addition to said objective lens so as to result in an  
20 infinity imaging system.

10. The improvement of claim 9 which further includes a temperature  
controlled chamber surrounding said microscope stage.

25 11. The improvement of claim 10 which further includes providing a means  
for rotating said microscope stage and employing a rotatable circular disc as the means  
containing one or more samples for viewing.

12. An improvement in a system for use in high resolution, three dimensional,  
30 fluorescence microscopy applications including:

an objective lens,

a microscope stage for receiving and positioning a means for containing one or  
more samples to be viewed through said lens,

a light source providing light from the UV to the near IR wavelengths,  
an excitation light pathway from said light source through said lens to said  
sample which includes means for directing light from said light source to said lens and  
means for selecting a desired wave length for excitation,

- 5            an emission light pathway from said sample through said objective lens to at least  
one CCD which includes a light path selector and an emission filter means, and  
a computer imaging means connected to said CCD,  
wherein said improvement comprises providing a pulsing light source which  
emits light at a speed consistent with the of data collection.

10

13.    The improvement of claim 12 which further includes providing a means  
for rotating said microscope stage and employing a rotatable circular disc as the means  
containing one or more samples for viewing.

15

14.    An improvement in a system for use in high resolution, three dimensional,  
fluorescence microscopy applications including:

an objective lens,

a microscope stage for receiving and positioning a means for containing one or  
more samples to be viewed through said lens,

20

a light source providing light from the UV to the near IR wavelengths,  
an excitation light pathway from said light source through said lens to said  
sample which includes means for directing light from said light source to said lens and  
means for selecting a desired wave length for excitation,

25

an emission light pathway from said sample through said objective lens to at least  
one CCD which includes a light path selector and an emission filter means, and  
a computer imaging means connected to said CCD,  
wherein said improvement comprises providing multiple CCD detectors and  
beam splitters and filters in the emission light pathway which cause the same primary  
light to be imaged on multiple CCD detectors.

30

15.    The improvement of claim 14 which further comprises providing a  
secondary lens in addition to said objective lens so as to result in an infinity imaging  
system.

16. The improvement of claim 14 which further includes providing a means for rotating said microscope stage and employing a rotatable circular disc as the means containing one or more samples for viewing.

5

17. An improvement in a system for use in high resolution, three dimensional, fluorescence microscopy applications including:

an objective lens,

a microscope stage for receiving and positioning a means for containing one or

10 more samples to be viewed through said lens,

a light source providing light from the UV to the near IR wavelengths,

an emission light pathway from said light source through said lens to said sample which includes means for directing light from said light source to said lens and means for selecting a desired wave length for excitation,

15 an excitation light pathway from said sample through said objective lens to at least one CCD which includes a light path selector and an emission filter means, and a computer imaging means connected to said CCD,

wherein said improvement comprises providing means for recognizing patterns and signature that detect specific spheres based on curvature signature.

20

18. The improvement of claim 17 which further comprises providing a secondary lens in addition to said objective lens so as to result in an infinity imaging system.

25 19. The improvement of claim 17 which further includes providing a means for rotating said microscope stage and employing a rotatable circular disc as the means containing one or more samples for viewing.

1/2

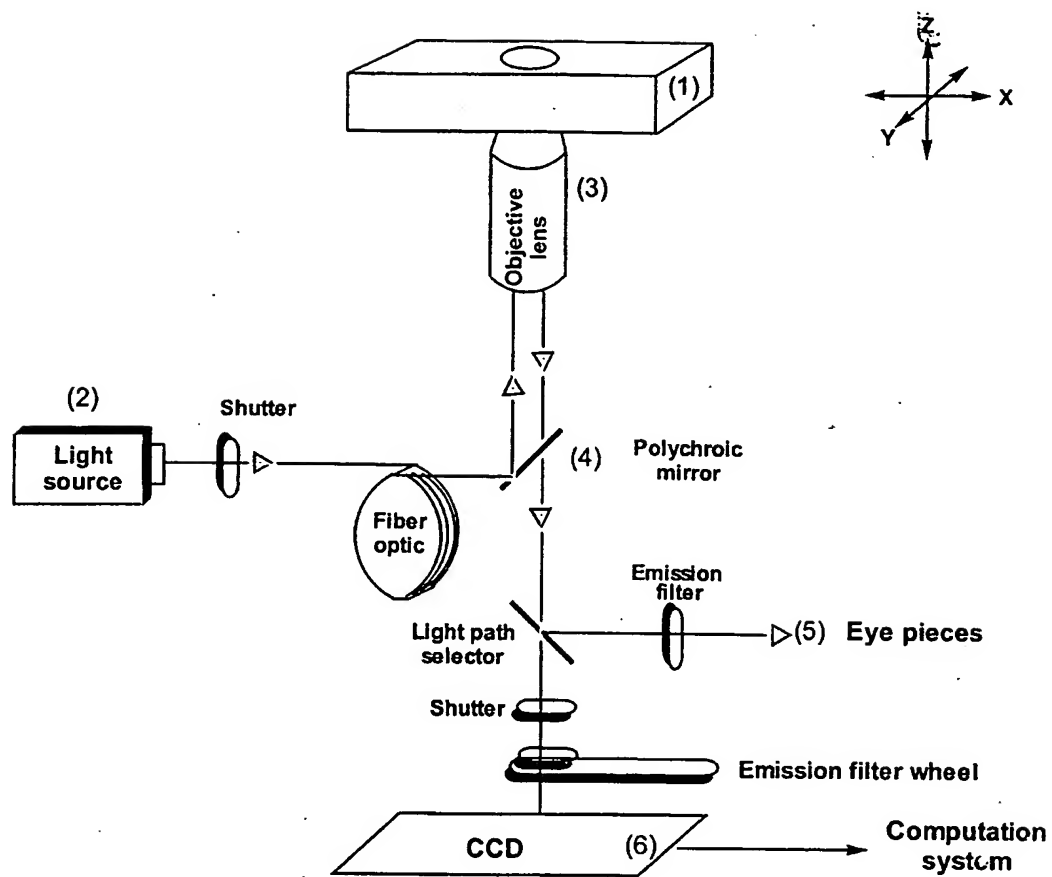


Figure 1



2/2

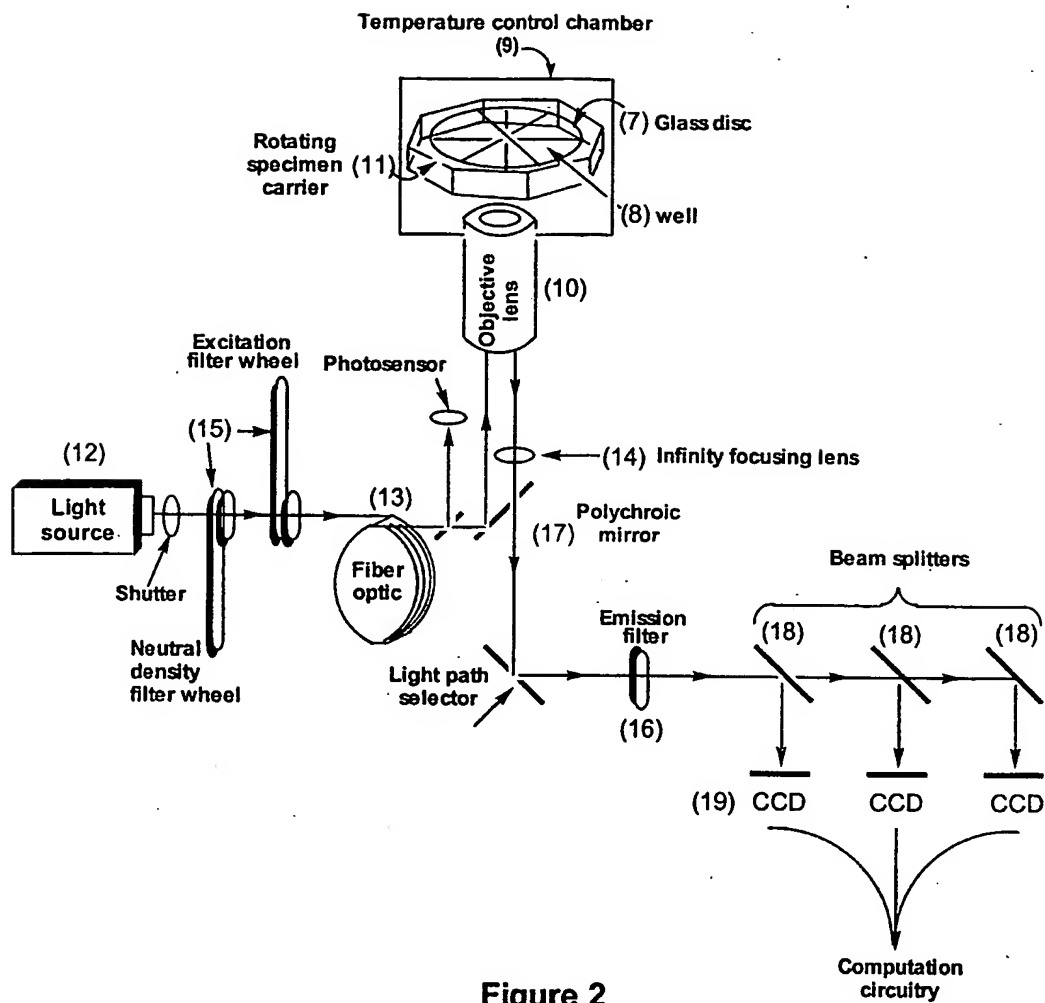



Figure 2



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : G02B 21/26, 21/16		A3	(11) International Publication Number: WO 00/19262
			(43) International Publication Date: 6 April 2000 (06.04.00)
(21) International Application Number: PCT/US99/19086			(81) Designated States: AU, CA, IL, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 23 August 1999 (23.08.99)			
(30) Priority Data: 60/102,434 30 September 1998 (30.09.98) US			
(71) Applicant: TRELLIS BIOINFORMATICS, INC. [US/US]; 1489 Webster Street, 521, San Francisco, CA 94115 (US).			
(72) Inventors: KAUVAR, Lawrence, M.; 1489 Webster Street, 521, San Francisco, CA 94115 (US). SEDAT, John; San Francisco, CA 94127 (US).			
(74) Agents: MURASHIGE, Kate, H. et al.; Morrison & Foerster LLP, 2000 Pennsylvania Avenue, N.W., Washington, DC 20006-1888 (US).			Published <i>With international search report.</i>
(88) Date of publication of the international search report: 21 September 2000 (21.09.00)			

(54) Title: HIGH THROUGHPUT MICROSCOPY

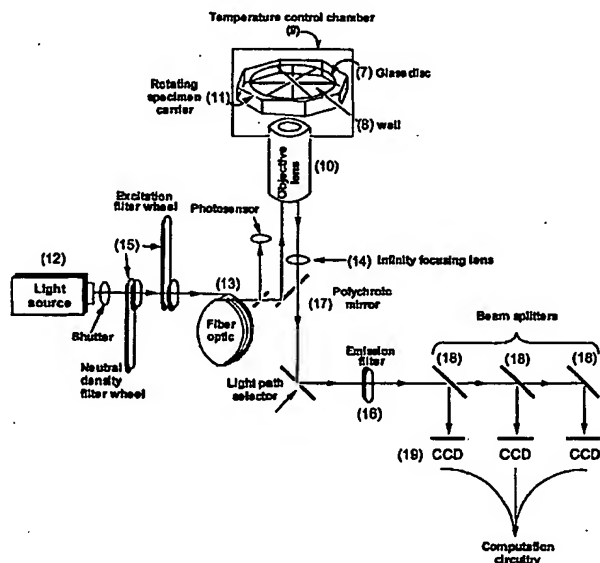

## (57) Abstract

A system for use in high resolution, high throughput, three-dimensional, fluorescence microscopy includes one or more of the following in operable combination: a circular rotatable disc to present a multiplicity of samples for viewing with an infinity imaging means, a pulsed light source which emits light at intervals consistent with data collection, beam splitters and filters in the emission light pathway which cause the same primary light to be imaged on multiple CCD detectors, means for regulating the temperature of the sample, and means for recognizing patterns and signatures that detect specific features of the components of a sample.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/19086

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 G02B21/26 G02B21/16		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 G02B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 17992 A (APPLIED IMAGING INC ;GINESTET JACQUES (US)) 30 April 1998 (1998-04-30) page 5, line 36 -page 6, line 35; figure 1 ---	1-3
Y	US 3 762 798 A (GRUBB J ET AL) 2 October 1973 (1973-10-02) column 2, line 53 -column 3, line 65; figures 1-4 ---	1-3
A	US 5 684 628 A (GERHARD GREGORY J) 4 November 1997 (1997-11-04) cited in the application the whole document ---	1
A	US 4 589 741 A (CLEGG JOHN E) 20 May 1986 (1986-05-20) the whole document ---	1-3
-/--		
<div style="display: flex; justify-content: space-between;"> <span><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input checked="" type="checkbox"/> Patent family members are listed in annex.</span> </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents:</p> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>*Z* document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search	Date of mailing of the international search report	
31 January 2000	08.05.00	
Name and mailing address of the ISA	Authorized officer	
European Patent Office; P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl Fax: (+31-70) 340-3016	SARNEEL, A	

# INTERNATIONAL SEARCH REPORT

Inter. Patent Application No  
PCT/US 99/19086

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 367 401 A (SAULIETIS INDULIS) 22 November 1994 (1994-11-22) column 3, line 38 -column 4, line 35; figures 1,2 ---	1-3
A	"LOCAL FLUORESCENCE QUENCHING PROBE" IBM TECHNICAL DISCLOSURE BULLETIN,US,IBM CORP. NEW YORK, vol. 35, no. 3, 1 August 1992 (1992-08-01), pages 146-148, XP000326212 ISSN: 0018-8689 the whole document -----	1

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 99/ 19086

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- |                  |                  |
|------------------|------------------|
| 1. Claims: 1-8   | 4. Claims: 14-16 |
| 2. Claims: 9-11  | 5. Claims: 17-19 |
| 3. Claims: 12,13 |                  |

For further information please see form PCT/ISA/206 mailed 14.02.2000.

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-8

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

1. Claims: 1-8

microscope with rotatable sample disk

2. Claims: 9-11

microscope with an infinity imaging system

3. Claims: 12,13

microscope with pulsing light source

4. Claims: 14-16

microscope with multiple CCD detectors

5. Claims: 17-19

microscope with pattern recognition means

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US- 99/19086

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9817992	A	30-04-1998	US	5880473 A	09-03-1999
			AU	4920297 A	15-05-1998
-----					
US 3762798	A	02-10-1973	DE	2205880 A	02-08-1973
-----					
US 5684628	A	04-11-1997	NONE		
-----					
US 4589741	A	20-05-1986	NONE		
-----					
US 5367401	A	22-11-1994	NONE		
-----					